




Shrink Polymer Systems

Cable Installation Materials – 24 volts to 36 kV


Bushing Protection Boots 7.2 to 36kV

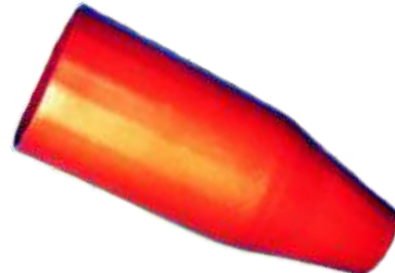

PART NUMBER	CABLE RANGE	VOLTAGE
RABK 1-2	16-300mm ²	7.2-17.5kV
RABK 3	400-800mm ²	7.2-17.5kV
RABK 1-2(24)	35-240mm ²	24kV
RABK 4	50-630mm ²	36kV

PART NUMBER	CABLE RANGE	VOLTAGE
STBK 1-2	16-300mm ²	7.2-17.5kV
STBK 3	400-800mm ²	7.2-17.5kV
STBK 1-2(24)	35-240mm ²	24kV
STBK 4	50-630mm ²	36kV

Solderless Earth Kits for Copper Tape Screens 7.2 to 36kV

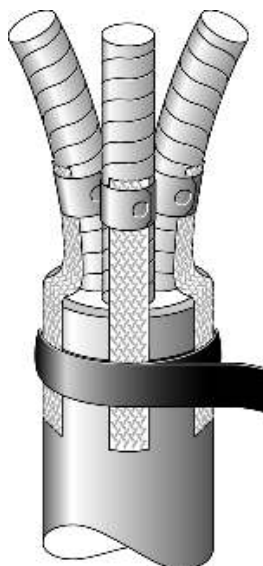

VOLTAGE 7.2kV	12kV	17.5kV	24kV	36kV	PART NO
CONDUCTOR SIZE (mm ²)					
25-50	25-50	25-50	---	---	SPS 204
70-95	70-95	70-95	35-50	---	SPS 205
120-240	120-240	120-240	95-185	50-70	SPS 206
300-630	300-630	300-630	240-500	95-300	SPS 207
---	800-1000	800-1000	630-800	400-630	SPS 208
---	---	---	---	800-1000	SPS 209

EACH KIT CONTAINS A SET OF THREE

IF 3 CORE SYSTEM SUFFIX PART NUMBER (3C)

IF 1 CORE SYSTEM SUFFIX PART NUMBER (1C)

EG: 70-95mm² KIT FOR 3 CORE 12kV CABLE WOULD BE SPS 205(3C)

NOTE:- MOISTURE/SOLDER BLOCK IS INCORPORATED IN EACH BRAID.

FOR CABLE SIZES NOT LISTED PLEASE CONTACT SHRINK POLYMER SYSTEMS.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK