

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 977582

Insulating mats
and platforms

Arc flash
equipment

Equipment for
working on pole

Working gloves

Handling leather and cotton gloves. Docker type.



EN 388
CE

CG-97-C

Single size (C = 10)

Insulating boots

Made from elastomer canvas support, very flexible and resistant. Anti-perforation stainless steel sole and shell. Anti-slip sole. Protection against step and touch hazardous potential gradients.



EN 345

MV-135*

60 x 210 x 460 mm - Weight: 0.730 kg

* Add sizes: 39-40/41-42-43/44-45-46/47.

Insulating platform (indoor models)

Moulded insulating material, one-piece. Top 50 x 50 cm.



Reference	Rated insulation (V)	Height (mm)	Weight (kg)
CT-7-25/1	24000	220	3.7
CT-7-40/1	40000	260	3.8

Insulating platform (outdoor models)


Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm. Feet with rubber tips.



Reference	Rated insulation (V)	Number of skirts per foot	Height (mm)	Weight (kg)
CT-9-25	24000	2	350	6.00
CT-9-45	45000	3	435	6.50

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface. High quality dielectrical rubber.

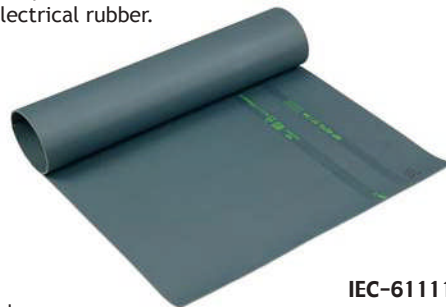

IEC-61111

Individual models.

Reference	Thickness (mm)	Class	Network Voltage (kV)	Dimensions (m)
MP-42/11	3	3	≤ 26.5	1 x 1
MP-42/16	3	3	≤ 26.5	0.6 x 1
MP-42/66	3	3	≤ 26.5	0.6 x 0.6

For placing in front of panels.

Reference	Thickness (mm)	Class	Network Voltage (kV)	Dimensions (m)
MP-60/03-5	3	3	≤ 26.5	0.6 x 5
MP-60/03-10	3	3	≤ 26.5	0.6 x 10
MP-100/03-5	3	3	≤ 26.5	1 x 5
MP-100/03-10	3	3	≤ 26.5	1 x 10
MP-60/05-5	5	4	≤ 36	0.6 x 5
MP-60/05-10	5	4	≤ 36	0.6 x 10
MP-100/05-5	5	4	≤ 36	1 x 5
MP-100/05-10	5	4	≤ 36	1 x 10

Bags for insulating mats

Specially designed for carrying and protecting insulating mats. Equipped with a shoulder strap and a plastic window for instructions and storage identification.



MP-01

For MP-42/16 and MP-42/66 - Length: 70 cm

MP-02

For MP-42/11 - Length: 110 cm

Multi-pockets electrician bag

Specially designed for carrying and protecting insulating mats, face shield and controllers. Equipped with several pockets.



M-87386

65 x 15 x 25 cm