

Industrial Gland Kits

AXT Brass Gland Kit AXT-K Series



Application

- > Indoor/outdoor type for flexible wire braid cable (e.g CY or SY types)

Features & Benefits

- > For circular unarmoured, or wire braid armoured or screened, plastic or rubber sheathed cables
- > Superior retention capability
- > Zero Halogen - high temperature silicone seals, LUL approved.
Rated between -50°C and 200°C
- > IP66/IP68 seal (tested to a depth of 10m for 168 hours)
- > Improved cable range accommodation

Technical Data

- > EN 50262
- > Quicker and easier to install
- > CuZn39Pb3 brass alloy used for guaranteed strength and performance
- > In kit form, comprising of 2 glands complete with locknut, washers, earth tag and shroud




CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS



11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582



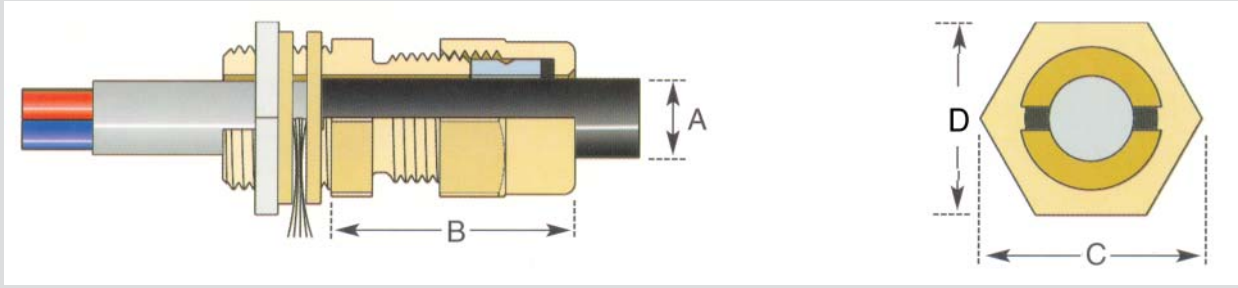

Gland Details

Gland kit	Cable diameter A		Across Corners C mm	Protrusion Length B mm	Kit reference
	Min mm	Max mm			
20S	5.5	11.5	24.72	34.0	AXT20SK
20	8.0	16.0	28.70	44.0	AXT20K
25	11.5	21.0	36.87	46.0	AXT25K

NB. Entry Thread length = 15mm



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582

