


BS6622/BS7835 Three core Armoured 33kV

XLPE Stranded Copper Conductors

CABLE CHARACTERISTICS



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK

CABLE DESCRIPTION

1.CONDUCTOR

Compact circular stranded copper conductor complying with BS6360 Class 2.

CONDUCTOR SCREEN

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature at 90°C.

2.INSULATION

Extruded cross-linked polyethylene (XLPE) or alternatively cross-linked ethylene propylene rubber (EPR) suitable for operation at a conductor temperature of 90°C.

3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as standard but fully bonded screens may be provided if specified.

4.METALLIC SCREEN

Copper tapes applied overlapped to provide an earth fault current path.

5.LAYING UP

Three cores laid up with polypropylene string fillers to form a compact circular cable, and bound with tape.


6.TAPE BINDER

7.SHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

8.ARMOURING

Single layer of galvanised circular steel wires.

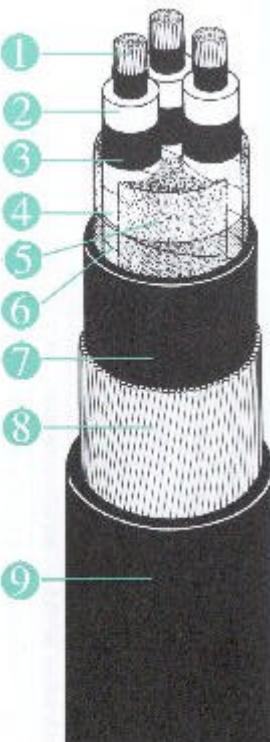

9.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified e.g medium density polyethylene (MDPE).

BS6622/BS7835 Three core Armoured 33kV

XLPE Stranded Copper Conductors

Constructional Data

Cross-sectional area mm ²	Minimum average thickness of insulation mm	Nominal diameter over insulation mm	Nominal thickness of PVC/LSOH bedding mm	Nominal number and diameter of armoured wires no./mm	Nominal thickness of PVC/LSOH oversheath mm	Nominal overall diameter of cable mm
50	8	27.1	1.8	60/3.15	3.4	78.5
70	8	28.9	1.8	64/3.15	3.5	82.6
95	8	30.6	1.9	67/3.15	3.6	86.7
120	8	32.1	2.0	70/3.15	3.7	90.3
150	8	33.4	2.0	72/3.15	3.8	93.3
185	8	35.2	2.1	76/3.15	3.9	97.6
240	8	37.4	2.2	80/3.15	4.1	102.9
300	8	39.7	2.3	85/3.15	4.3	108.5
400	8	42.4	2.4	90/3.15	4.5	114.9

Installation Data

Cross-sectional area mm ²	Approximate cable weight kg/m	Nominal drum length m	Minimum bending radius mm	Nominal internal diameter of ducts mm
50	9.7	350	1450	125
70	10.7	350	1500	125
95	12	300	1600	125
120	13.3	250	1650	150
150	14.4	250	1700	150
185	16.1	250	1800	150
240	18.4	250	1900	150
300	21	250	2000	150
400	24.2	250	2100	150

Electrical Data

Cross-sectional area mm ²	Maximum DC resistance of conductor at 20°C μOhms/m	Maximum AC resistance of conductor at 90°C μOhms/m	Reactance at 50Hz μOhms/m	Impedance at 50Hz μOhms/m	Maximum capacitance pF/m	Maximum charging current at normal voltage and frequency mA/m
50	387.0	494	143	513	142	0.85
70	268.0	343	134	367	159	0.95
95	193.0	248	127	278	175	1.05
120	153.0	196	122	231	189	1.13
150	124.0	159	118	197	201	1.21
185	99.1	128	114	171	217	1.30
240	75.4	98	109	146	237	1.42
300	60.1	80	105	131	258	1.55
400	47.0	64	102	120	282	1.69

BS6622/BS7835 Three core Armoured 33kV

XLPE Stranded Copper Conductors

Ratings Data

Cross-sectional area mm ²	Current Ratings			Short circuit ratings	
	Laid direct in ground Amps	Drawn into ducts Amps	Laid in air Amps	One second short circuit rating of conductor kA	One second short circuit rating of copper tape screen per core kA
50	210	185	225	6.8	-
70	255	225	275	9.8	-
95	295	260	330	13.3	Typically
120	335	300	380	17.2	Less
150	375	335	430	21.2	Then
185	420	380	490	26.6	1kA
240	480	430	570	34.9	-
300	530	480	650	43.8	-
400	580	530	720	57.3	-

Current Ratings Conditions:

Ground Temperature 15°C
 Ambient temperature (air) 25°C
 Depth of burial 0.8m
 Thermal resistance of soil 1.2°C m/W



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK



Formerly Pirelli Cables