

Industrial Glands

CW Aluminium Gland with Integral Earth 454CE Series



Application

- > For aluminium wire armour cable

Features & Benefits

- > Aluminium indoor and outdoor cable gland with earth bonding connection
- > Suitable for circular aluminium single wire armoured, plastic or rubber sheathed cables
- > Outer seal grips sheath of cable
- > For use in most climatic conditions, weatherproof and waterproof
- > Three part armour lock with separate armour locking ring
- > Accessories available separately

Technical Data


- > EN50262
- > Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
- > Service temperature range -20°C to +90°C
- > Integral earth connection complies with GDCD 190 Category A (43.3kA for 1 second)



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK



CW Aluminium Gland with Integral Earth 454CE Series

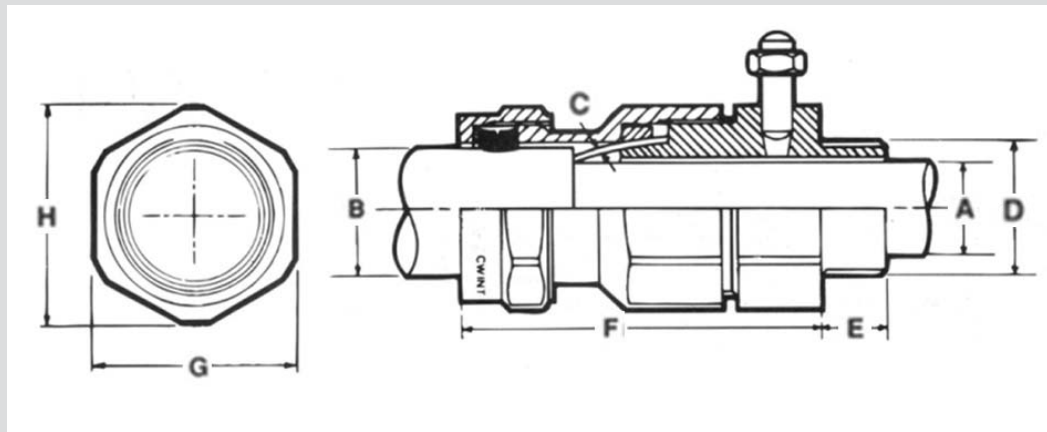

Gland Details

Cable dimensions accommodated mm					Gland Reference		Glands dimension mm					Accessories
Diameter				Armour wire diameter C	Size	Design Number	Entry thread		Approx. length from shoulder F	Hexagon size		Aluminium backnut
Under armour A		Overall B					Size D	Length E		Across flats G	Across corners H	Design number
Min	Max	Min	Max									
-	26.2	23.5	33.5	1.6 / 2.0	32	454CE-56	M32 × 1.5	10	73	56.4	61.5	459AA-56
-	32.1	29.0	39.9	1.6 / 2.0	40	454CE-57	M40 × 1.5	15	77	56.4	63.2	459AA-57
-	44.0	39.5	52.6	2.0 / 2.5	50	454CE-59	M50 × 1.5	15	84	70.1	77.2	459AA-59
-	55.9	51.3	65.3	2.5	63	454CE-61	M63 × 1.5	15	84	90.2	99.1	459AA-61
-	67.9	62.5	78.0	2.5	75	454CE-63	M75 × 1.5	15	94	106.2	117.0	459AA-63

Larger sizes of glands are available upon request



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

