

Industrial Gland Kits

CW LSOH Brass Gland Kit LSF - CW Series



Application

- > Indoor/outdoor type for SWA cable

Features & Benefits

- > Brass indoor and outdoor cable gland & accessories
- > For circular, galvanized-steel single-wire-armour plastic or rubber sheathed cables
- > Outer seal grips sheath of cable
- > For use in most climatic conditions, weatherproof and waterproof
- > Three part armour lock with separate armour locking ring, ideal for checking electrical continuity
- > Kit comprises:
 - CW Gland
 - Brass earth tag
 - Brass locknut
 - LSF shroud
- > 2 per kit up to and including 25mm size

Technical Data

- > EN 50262
- > Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
- > Service temperature range -20°C to +90°C
- > CuZn39Pb3 extruded brass alloy used for guaranteed strength and performance
- > Zero Halogen Silicone seals and shrouds - LUL approved



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk


Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582



CW LSOH Brass Gland Kit LSF - CW Series

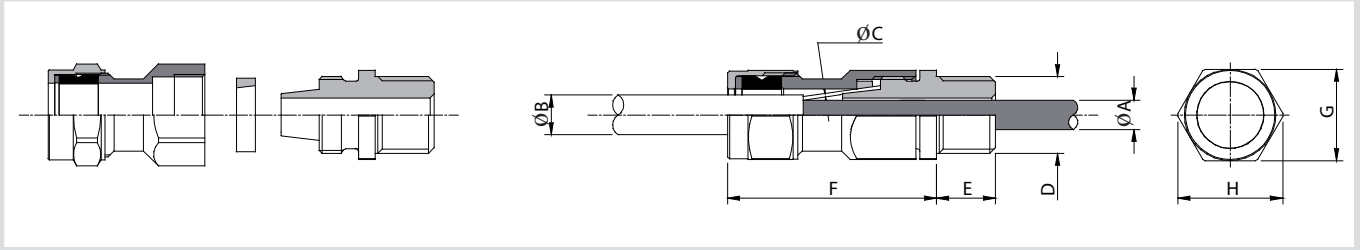

Gland Details

Cable Dimensions mm				Kit Reference			Gland Dimensions mm				
Under Armour Diameter A	Overall Diameter B		Armour Wire Diameter C	Size	Design Number	Items Per Pack	Entry Thread		Approx. Length From Shoulder F	Hexagon Size	
	Min	Max					Size D	Length E		Across Flats G	Across Corners H
Max											
8.6	8.0	13.2	0.9	20SS	LSF20SSCW	2	M20 × 1.5	10	44	23.4	26.7
11.6	8.0	15.8	0.9	20S	LSF20SCW	2	M20 × 1.5	10	46	25.7	29.2
13.9	11.7	20.8	0.9 / 1.25	20	LSF20CW	2	M20 × 1.5	10	46	30.5	34.0
19.9	17.0	27.2	1.25 / 1.6	25	LSF25CW	2	M25 × 1.5	10	51	37.6	42.2
26.2	23.5	33.5	1.6 / 2.0	32	LSF32CW	1	M32 × 1.5	10	56	47.3	53.6
32.1	29.0	39.9	1.6 / 2.0	40	LSF40CW	1	M40 × 1.5	15	59	56.4	61.5
38.1	38.0	46.2	2.0 / 2.5	50S	LSF50SCW	1	M50 × 1.5	15	64	65.5	72.1
44.0	39.5	52.6	2.0 / 2.5	50	LSF50CW	1	M50 × 1.5	15	64	70.1	77.2
55.9	51.3	65.3	2.5	63	LSF63CW	1	M63 × 1.5	15	67	80.0	87.4
67.9	62.5	78.0	2.5	75	LSF75CW	1	M75 × 1.5	15	76	98.8	109.2



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582

