

# LV Resin Cable Joints - Branch


suitable for PVC or XLPE cable, 1kV



## Service Branch Joints

CU range

“Universal” joints for branch & straight jointing

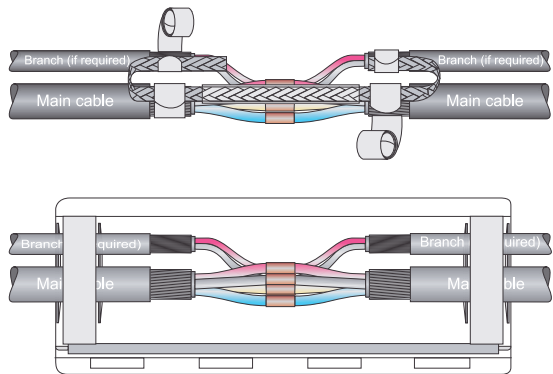

Main Cable Size 2,3 & 4 core (mm <sup>2</sup> )	Max Branch Cable 2,3 & 4 core (mm <sup>2</sup> )	Basic Joints	Basic Joints plus Mech. Connectors	
		Part No	Part No	Connectors included
<b>Armoured &amp; Unarmoured Cable - Uncut Main</b>				
1.5 - 2.5	1 x 2.5	CU0	CU0+C	4 x MC3
4 - 6	2 x 6	CU1	CU1+C	4 x MC3
10 - 25	2 x 25	CU2	CU2+C	4 X MC2
35 - 50	2 x 35	CU3	CU3+C	4 x MC3/3
70 - 95	2 x 35	CU4	CU4+C	4 x MC4/1
120 - 185	2 x 35	CU5	CU5+C	4 x MC4/2

## CB range

## CB ring connector range



Main Cable Size 2,3 & 4 core (mm <sup>2</sup> )	Max Branch Cable 2,3 & 4 core (mm <sup>2</sup> )	Basic Joints	Basic Joints plus Mech. Connectors	
		Part No	Part No	Connectors included
<b>Armoured &amp; Unarmoured Cable - Uncut Main</b>				
1.5 - 16	16	CB1	CB1+C	4 x MC3/1
25 - 35	35	CB2	CB2+C	4 x MC2
50 - 70	35	CB2.5	CB2.5+C	4 x MC4/1

Main Cable Size 4 core (mm <sup>2</sup> )	Max Branch Cable 2,3 & 4 core (mm <sup>2</sup> )	Part No Inc ring connector
<b>Armoured &amp; Unarmoured Cable - Uncut Main</b>		
25 - 70	50	CB1.5+MCR1
70 - 150	70	CB2.5+MCR2
95 - 185	70	CB2.5+MCR3



## Mains Branch Joints

CBM range



Uncut Main Cable 2, 3 & 4 core (mm <sup>2</sup> )	Max Branch Cable 2,3 & 4 core (mm <sup>2</sup> )	Part No Inc mechanical connectors
<b>Armoured &amp; Unarmoured Cable</b>		
50 - 70	70	CBM0+C
95 - 120	120	CBM1+C
150 - 185	185	CBM2+C
240 - 300	300	CBM3+C

Cut Main Cable 2, 3 & 4 core (mm <sup>2</sup> )	Max Branch Cable 2,3 & 4 core (mm <sup>2</sup> )	Part No Inc mechanical connectors
<b>Armoured &amp; Unarmoured Cable</b>		
1.5 - 35	35	CBM1.5+C
50 - 150	150	CBM2.5+C
185 - 300	300	CBM3.5+C

Branch LV