


HYDRAULIC CUTTING TOOL

general features

Max cutting Ø mm	Dimensions mm		Weight kg
	length	width	
85	852,5	175	8,8

STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Available upon request
VAL P7	727x202x115	1,3	*	—

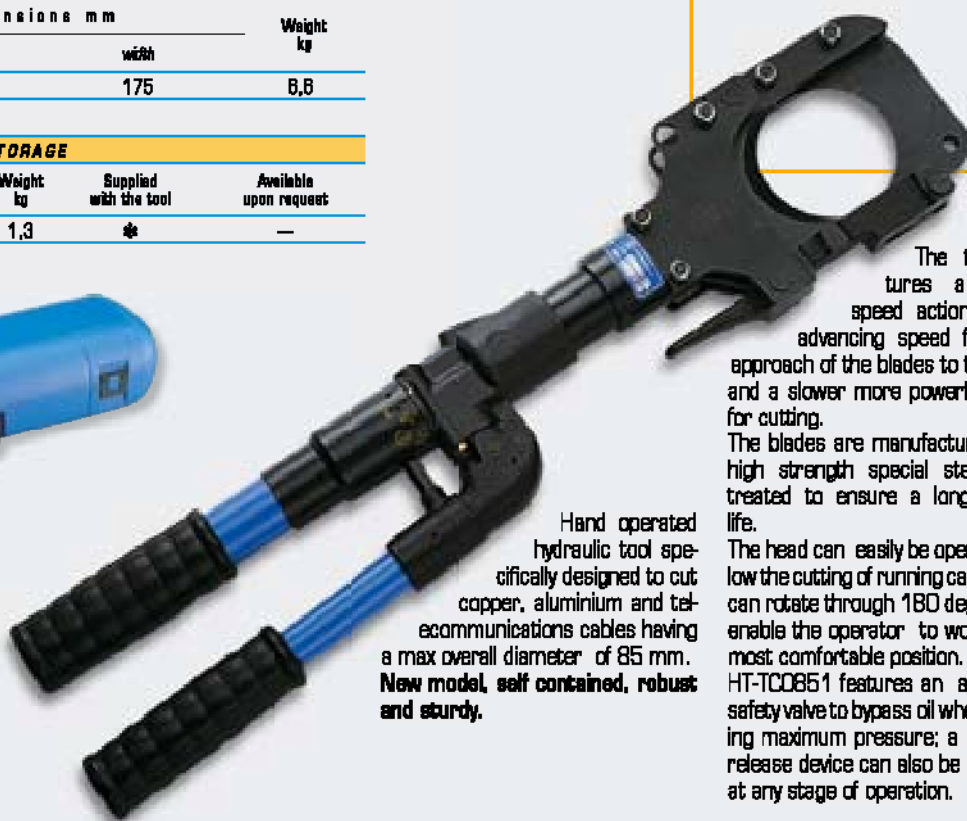

Hand operated hydraulic tool specifically designed to cut copper, aluminium and telecommunications cables having a max overall diameter of 85 mm. **New model, self contained, robust and sturdy.**

INDUSTRIAL APPLICATION HT-TC0851

The tool features a double speed action: a fast advancing speed for rapid approach of the blades to the cable and a slower more powerful speed for cutting.

The blades are manufactured from high strength special steel, heat treated to ensure a long service life.

The head can easily be opened to allow the cutting of running cables, and can rotate through 180 degrees, to enable the operator to work in the most comfortable position.

HT-TC0851 features an automatic safety valve to bypass oil when reaching maximum pressure; a pressure release device can also be operated at any stage of operation.

HYDRAULIC CUTTING HEAD

general features



Max cutting Ø mm	Max operating pressure bar	Dimensions mm		Weight Kg
		length	width	
85	700	409	135	4,9

STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Available upon request
VAL TC 085	485x155x85	2,4	*	—



INDUSTRIAL APPLICATION TC 085

Hydraulic cutting head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max. (see page 136-138)

TC085 features the same cutting capability as HT-TC0851.