


# WWW.CABLEJOINTS.CO.UK THORNE & DERRICK UK TEL 0044 191 490 1547 FAX 0044 477 5371 TEL 0044 117 977 4647 FAX 0044 977 5582 WWW.THORNEANDDERRICK.CO.UK



# **INNEX ZYZTEM**

**TECHNICAL DATA SHEET FOR DUMMY PLUG ID 1250A** 

### **TECHNICAL DATA SHEET FOR DUMMY PLUG ID 1250A**

### **PRODUCT DESCRIPTION**

Dummy plug **ID 1250A** is designed for voltage proof and shock protected sealing of bushing inside the MV equipment (transformer, switchgear, motor...). The main features are:

- fully compatible with inner cone bushing Size 3 (1250 A), according to DIN EN 50181;
- maintenance free;
- pre-tested and pre-assembly parts;
- completely solid insulation (no gas or liquid insulating medium);
- the metallic flange provides a total personnel safe against the accidental touch;
- protection class IP68.

### **BASIC COMPONENT**

- 1. Insulating body.
- 2. Fixing flange with screws and earthing lug.
- 3. Bonding lead.

### **ADDITIONAL OPTIONS**

Voltage tap.

### **SPECIFICATION AND STANDARD**

The INNEX dummy plug meets the requirements of **Cenelec HD 629.1 S1** and **IEC 60502-4**. It is approved by Enel specify **DJ 1132**.

## **ELETTRICAL DATA**

Maximum system voltage: 52 kV	AC Withstand (15 min.): 65 kV	
Impulse (BIL): 250 kV	Thermal cycles and AC withstand: 52 kV	
Partial discharge test: <5 pC at 39 kV	DC Voltage test (15 min.): 125 kV	


# **ORDER CODE**

ID 1250A E	Х	Х
	仓	仓
	SPECIAL OPTION	TYPE OF KIT
<b>W</b> = without voltage tap	•	
T = with voltage tap		
A = kit for one dummy plug		
<b>B</b> = kit for three dummy plug		

INNEX 2

### **TECHNICAL DATA SHEET FOR DUMMY PLUG ID 1250A**

### **GENERAL DIMENSIONS**

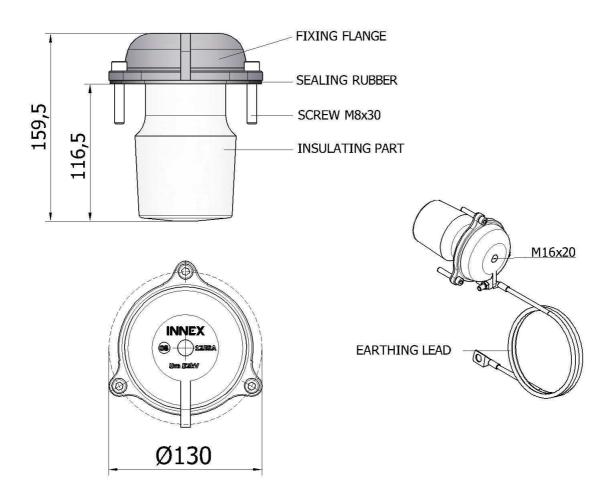



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

INNEX 3