


HDCO Heavy Duty Cut-out

MC630

Features

- ACCEPTS BS 88 J TYPE FUSE LINKS
- MAXIMUM RATING 630A
- FUSE CARRIER WITH 92MM CENTRES
- MOULDED IN LIGHT GREY GLASS REINFORCED POLYESTER DMC
- EACH PHASE FULLY INSULATED WITH SEPARATE LID
- WOODEN BATTENS PRE-DRILLED FOR WALL MOUNTING
- SINGLE PHASE OR THREE PHASE VERSIONS AVAILABLE
- MAXIMUM CABLE SIZE 2 X 300MM²
- CABLE ENTRY AND EXIT THROUGH PVC GROMMETS
- ALL CABLE TERMINATIONS MANUFACTURED IN HARD DRAWN COPPER
- COPPER NEUTRAL LINK SECURED BY BOLTS
- INCOMING CONNECTIONS CAN BE INSULATED WHILST TERMINATING OUTGOING CONNECTIONS

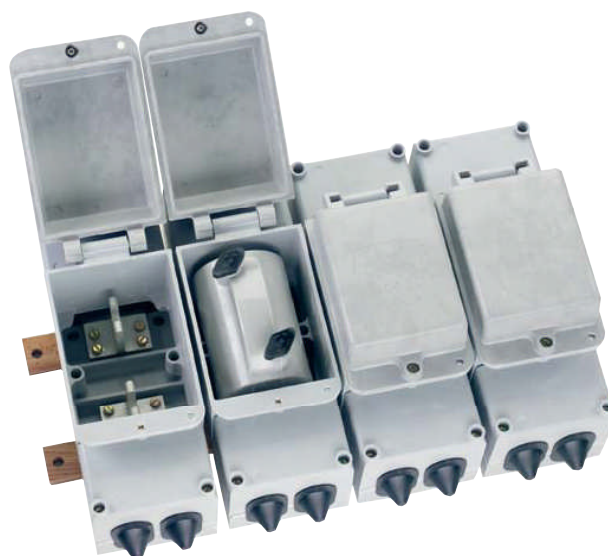

4MC630

MC630

Ref.	Description	Max Fuse rating	Max cable size	Dimensions in mm
MC630	Single Phase Heavy Duty Cut-out	630A	2X300mm ²	H350 W120 D180
4MC630	Three Phase and Neutral Heavy Duty Cut-out	630A	2X300mm ²	H350 W500 D195

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS



11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582